

**SINOSUN**

专业 · 实力 · 诚信 · 共赢



NEW TYPE OF GREEN SAND  
AGGREGATE PRODUCTION OVERALL SOLUTION

## 新型环保砂石骨料生产整体解决方案

致力于客户成功 为客户创造价值

COMMITTED TO CUSTOMER SUCCESS TO  
CREATE VALUE FOR CUSTOMERS

联系电话/Phone: +86 371 89915650  
Mobile/WhatsApp/WeChat: +86 135 2377 6367  
邮箱/E-mail: info@sinosun-group.com  
网址/Web: www.sinosun-group.com  
地址: 中国河南省南阳市溧河工业园区  
Add: Lihe Industry Zone, Nanyang City, Henan Province, China






## 专业的石料/再生料加工用破碎筛分设备

Professional crushing and screening equipment for stone/recycled materials processing

履山地之险，如平川之易

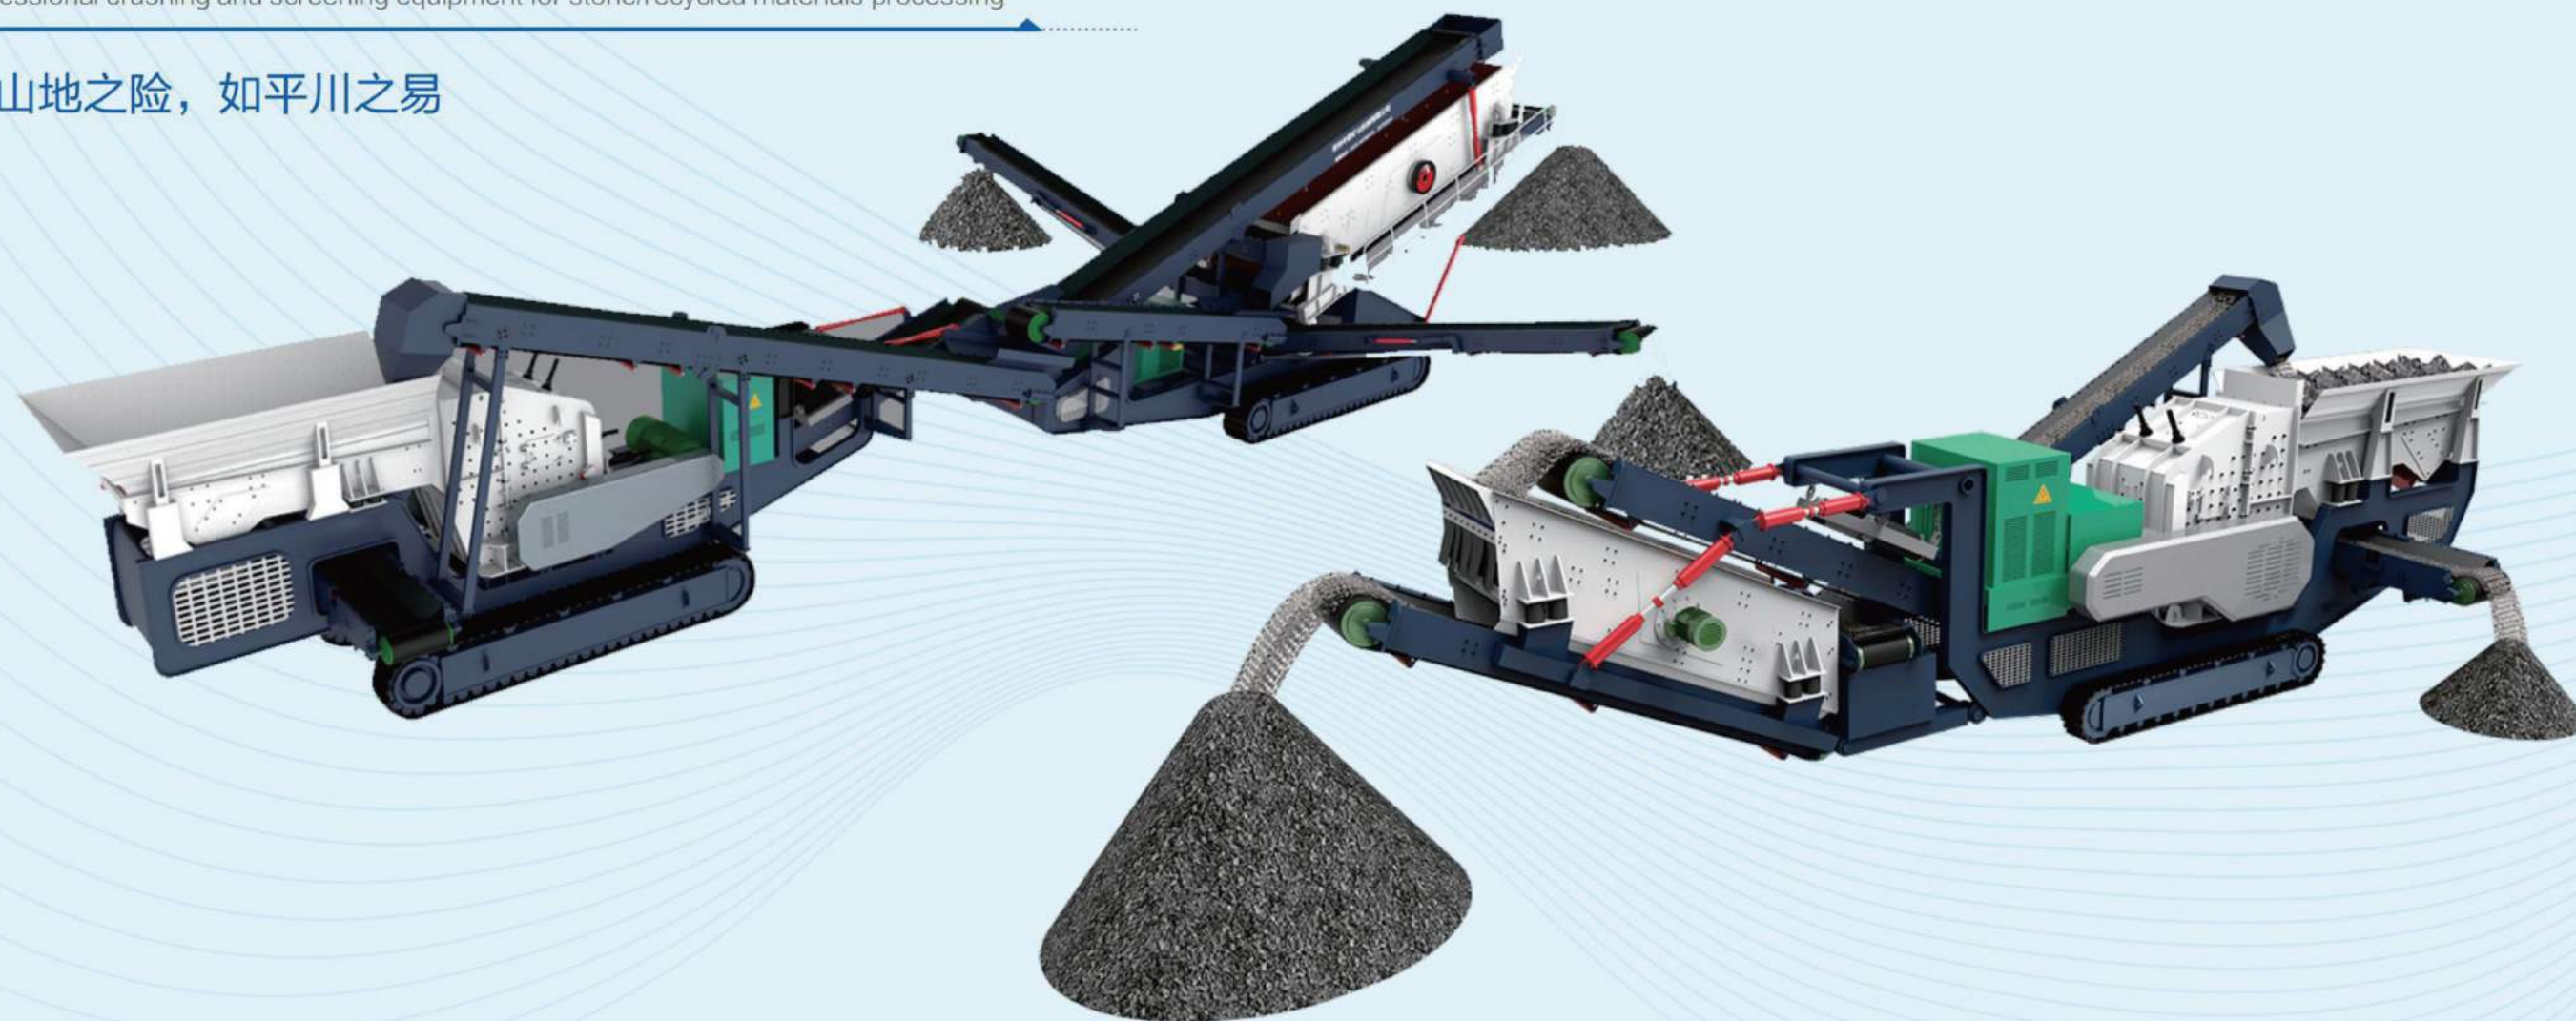

破碎比大中细碎作业



液压系统操作更方便



无线遥控器操作



履带行走，转场方便



高性能水平筛产量大




履带驱动用大扭矩马达，  
保证爬坡转弯动力



LDEP系列履带式颚破移动站

LDEP series crawler type E-breaking mobile station

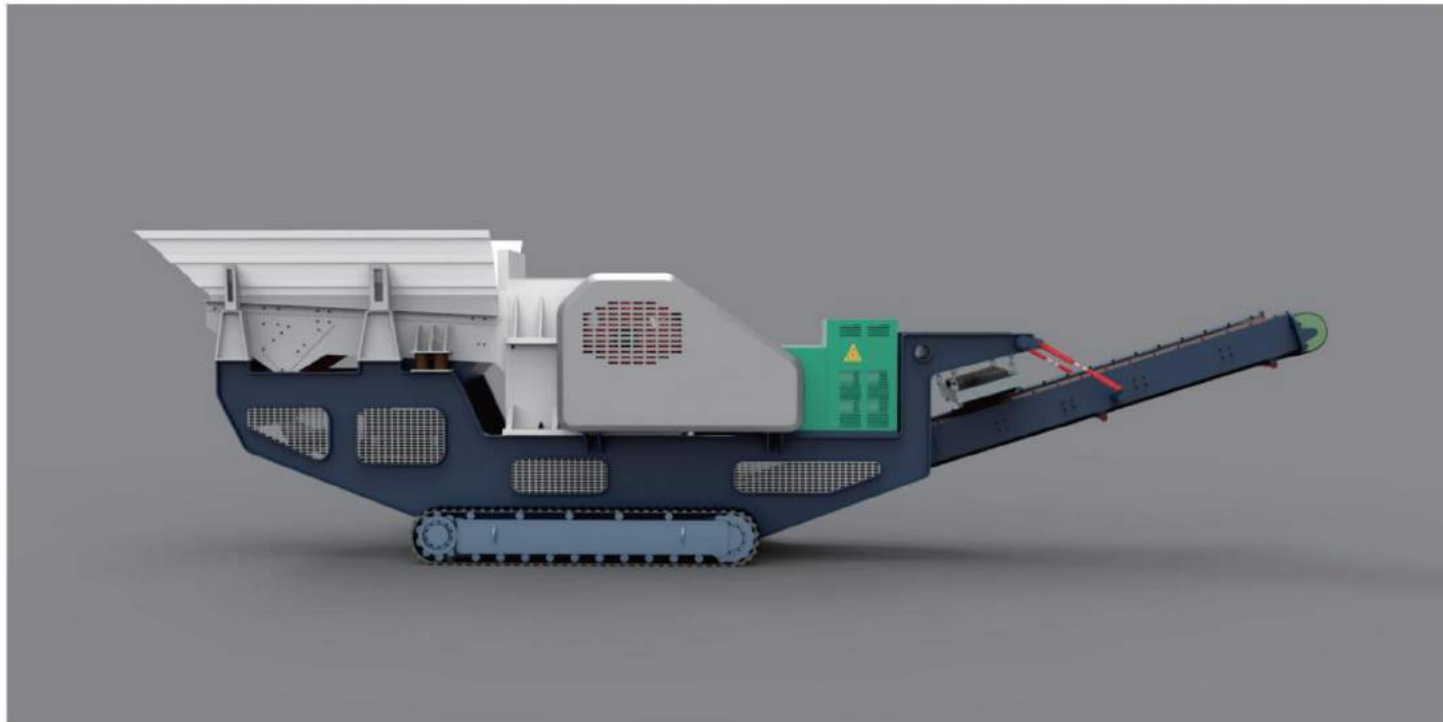

产品优势 ADVANTAGE

- ◆ 优质的动颚总成
  - ◆ 独特的破碎腔型
  - ◆ 破碎产量大
  - ◆ 方便操作，易于运行
  - ◆ 可实现快速转场作业
- ◆ Quality of hubei dynamic assembly
  - ◆ Unique crushing cavity type
  - ◆ Broken big capacity
  - ◆ Convenient operation, easy to run
  - ◆ Can realize quick turnarounds

产品参数 SPECIFICATION

| 型号         | LDEP0705  | LDEP0960  | LDEP1175   | LDEP1308 |
|------------|-----------|-----------|------------|----------|
| 料仓         | 整体钢结构     | 整体钢结构     | 可折叠钢结构     | 可折叠钢结构   |
| 给料机        | GZT0724   | GZT0932   | GZT1142    | ZSW1242  |
| 颚式破碎机      | PE500×750 | PE600×900 | PE750×1060 | PEW1208  |
| 最大进料粒度(mm) | 425       | 500       | 630        | 750      |
| 生产能力(t/h)  | 40-110    | 70-120    | 130-260    | 270-230  |
| 出料皮带机      | B800      | B800      | B1000      | B1200    |
| 出土皮带机      | B500      | B500      | B500       | B650     |
| 液压系统       | TC10      | YC20      | YC30       | YC30     |

注：1.发动机组仅驱动履带底盘行走及液压系统；2.主机颚式破碎机、给料机和皮带机需外接电源驱动。

产品介绍 INTRODUCE


该设备主机采用国际上流行硬岩颚式破碎机，采用模块化设计，可以适应严酷的移动式应用条件。

The main machine of this equipment adopts the internationally popular C-jaw crusher and adopts modular design, which can adapt to the harsh mobile application conditions.



CPP系列履带反击筛分站

CPP Series Crawler Counterattack Screening Station

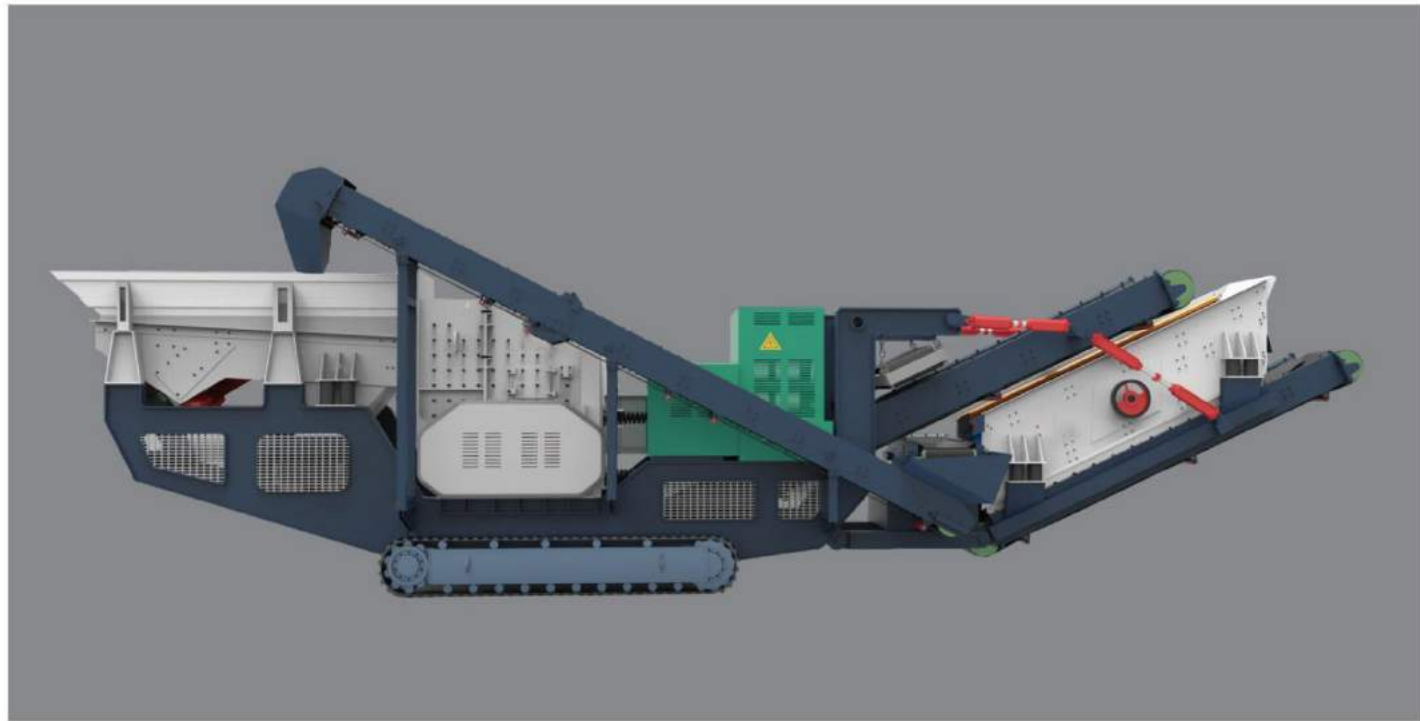

产品介绍 INTRODUCE

反击破筛分一体站配备新型破碎机，一个完整的破碎与筛选和再循环系统的多功能性设备，使得运营商破碎加筛分生产出成品物料只需一台机器。


Broken screen one station is equipped with new crusher, a complete crushing and screening and versatility of recirculation system equipment, makes the operator crushing and screening to produce a finished product material just a machine.

产品优势 ADVANTAGE

- ◆ 破碎力强，能耗少；
  - ◆ 结构紧凑，占地少；
  - ◆ 破碎石料粒型好，产量大；
  - ◆ 操作简单，方便维护；
  - ◆ 一站式作业，成本低。
- ◆ Crushing force, less energy consumption;
  - ◆ Compact structure, covers an area of less;
  - ◆ The size and the shape of broken stone, big capacity;
  - ◆ Simple operation, convenient maintenance;
  - ◆ One-stop operation, low cost.

产品参数 SPECIFICATION


| 名称            | CPP200      | CPPS200     | CPP260      | CPPS260     |
|---------------|-------------|-------------|-------------|-------------|
| 破碎机型号         | PFW1310     | PFW1310     | PFW1314     | PFW1314     |
| 破碎机进口口尺寸 (mm) | 1060 × 1200 | 1060 × 1200 | 1460 × 1200 | 1460 × 1200 |
| 破碎机排料口尺寸 (mm) | 20-80       | 20-80       | 30-100      | 20-100      |
| 给料机型号         | GZT1038     | GZT1038     | GTZ1538     | GTZ1538     |
| 给料机长度 (mm)    | 3800        | 3800        | 3800        | 3800        |
| 给料机宽度 (mm)    | 1000        | 1000        | 1500        | 1500        |
| 喂料高度 (mm)     | 4400        | 4400        | 4500        | 4500        |
| 主皮带卸料高度 (mm)  | 3000        | 2800        | 3000        | 2800        |
| 侧出皮带卸料高度 (mm) | 1600        | 1600        | 1600        | 1600        |
| 筛箱型号          |             | YK1332      |             | YA1535      |
| 筛箱长度 (mm)     |             | 3200        |             | 3500        |
| 筛箱宽度 (mm)     |             | 1300        |             | 1500        |
| 处理量 (t/h)     | 100-200     | 100-200     | 150-250     | 150-250     |

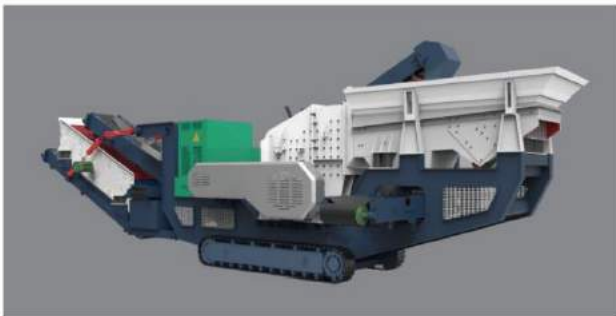



LDFJ系列履带式反击移动站

LDFJ Series Tracked Counterattack Mobile Station

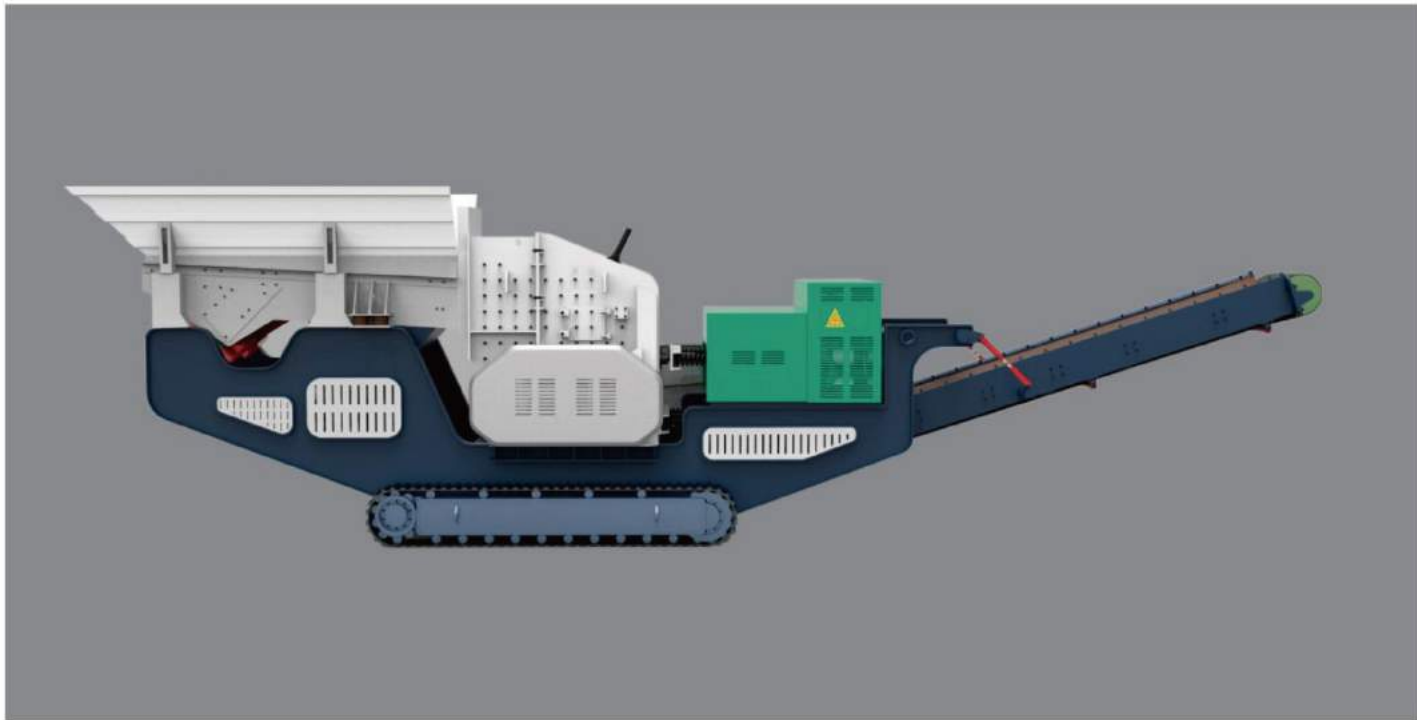

产品介绍 INTRODUCE

普盛研发的一款中型反击破碎站，在采石场和建筑垃圾固废回收利用上为操作者提供良好的破碎比和高度一致的产品粒形。

Like research and development of a medium-sized horizontal counterattack crushing plant, construction waste and solid waste recycling in a quarry on provide the operator with good crushing ratio and highly consistent product grain shape.


产品优势 ADVANTAGE

- ◆ 破碎主机能效高
  - ◆ 最终产品粒型好，破碎比大
  - ◆ 操作简单，维护方便
  - ◆ 配置灵活
  - ◆ 可实现快速转场作业
- ◆ Broken host high energy efficiency
  - ◆ The size and the shape of the end product is good, big crushing ratio
  - ◆ Broken big capacity
  - ◆ Convenient operation, easy to run
  - ◆ Can realize quick turnarounds

产品参数 SPECIFICATION


| 名称         | LDFJ1310 | LDFJ1314 | LDFJ1315 |
|------------|----------|----------|----------|
| 料仓         | 整体钢结构    | 整体钢结构    | 可折叠钢结构   |
| 给料机        | GZT1038  | GZT1538  | GZT1538  |
| 反击式破碎机     | PFW1310  | PFW1314  | PFW1315  |
| 最大进料粒度(mm) | 500      | 800      | 1000     |
| 生产能力(t/h)  | 70-150   | 120-200  | 150-280  |
| 出料皮带机      | B1000    | B1200    | B1200    |
| 出土皮带机      | B500     | B650     | B650     |
| 履带总成       | T45      | T55      | T55      |
| 除铁器        | RCYD-10  | RCYD-12  | RCYD-12  |

注：1.发动机组仅驱动履带底盘行走液压系统；2.反击破碎机主机、给料机、皮带机需外接电源驱动；3.接受定制全液压驱动。

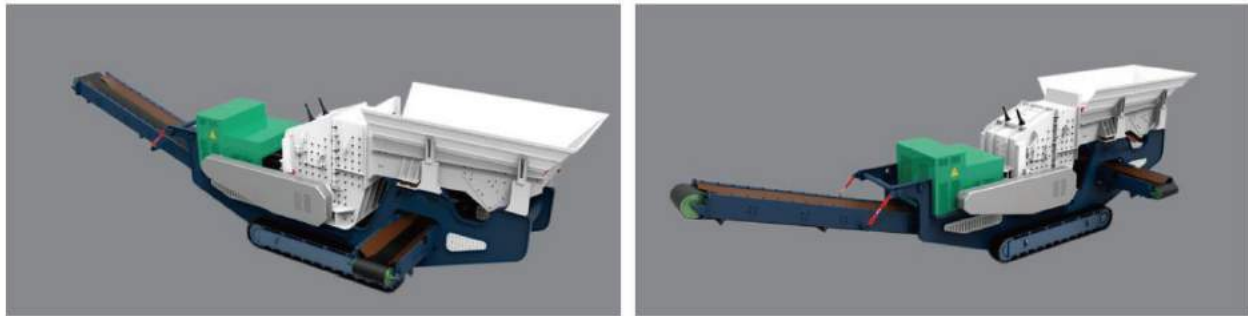

# LDSF系列履带式筛分站

LDSF Series Crawler Screening Station

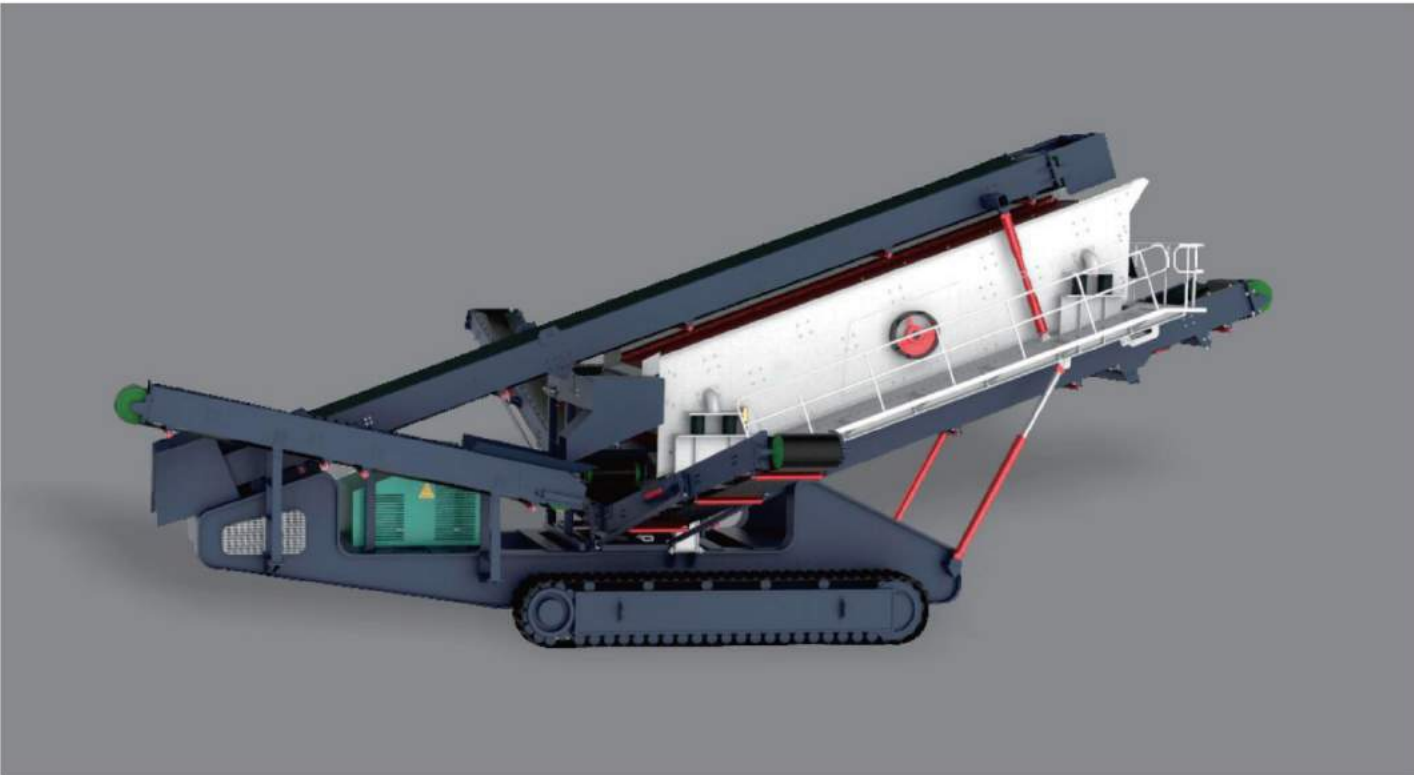

## 产品介绍 INTRODUCE

该机集受料、筛分、传送等工艺设备为一体，采用双层或三层筛分机主结构，并配有优良的网格筛选通道，适用于各种采石场和筛分建筑拆除废料、矿山作业等。


This machine is delivered by feeding, screening, such as process equipment, adopts double layer or three layer screen, the main structure, with fine mesh filter channel, and suitable for all kinds of quarry screening building demolition waste, mining operations, etc.

## 产品优势 ADVANTAGE

- ◆ 自动化筛分运动和调节，筛分效率高；
  - ◆ 低噪声和低排放的特点；
  - ◆ 移动运行装置，方便转场；
  - ◆ 智能工艺控制、操作便捷；
  - ◆ 可实现快速转场作业
- ◆ Automated screening exercise and adjustment, screening efficiency;
  - ◆ The characteristics of low noise and low emission;
  - ◆ EMobile device, convenient and transitions;
  - ◆ Intelligent control technology, convenient in operation;
  - ◆ Can realize quick turnarounds

## 产品参数 SPECIFICATION


| 名称        | LDSF200 |         | LDSF260 |     | LDSF300 |      |
|-----------|---------|---------|---------|-----|---------|------|
|           | 规格      | 功率 (kw) | 规格      | 功率  | 规格      | 功率   |
| 料仓        | LDYDS   | 0       | LDYDS   | 0   | LDYDS   | 0    |
| 振动筛       | 3YA1860 | 22      | 3YA2160 | 30  | 3WA2460 | 37   |
| 船型钢架      | LDYDS   | 0       | LDYDS   | 0   | LDYDS   | 0    |
| 液压总成      | LDYDS30 |         | LDYDS30 |     | LDYDS40 |      |
| 皮带输送机（出料） | B1000   | 11      | B1200   | 15  | B1400   | 18.5 |
| 皮带输送机（出料） | B500    | 5.5     | B650    | 5.5 | B800    | 7.5  |
| 皮带输送机（出料） | B500    | 5.5     | B650    | 5.5 | B800    | 7.5  |
| 皮带输送机（出料） | B500    | 5.5     | B650    | 5.5 | B800    | 7.5  |

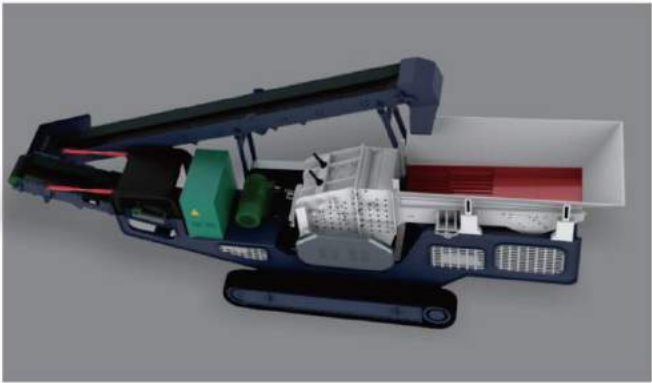



LDYZ系列履带式圆锥移动站

LDYZ Series Tracked Conical Mobile Station

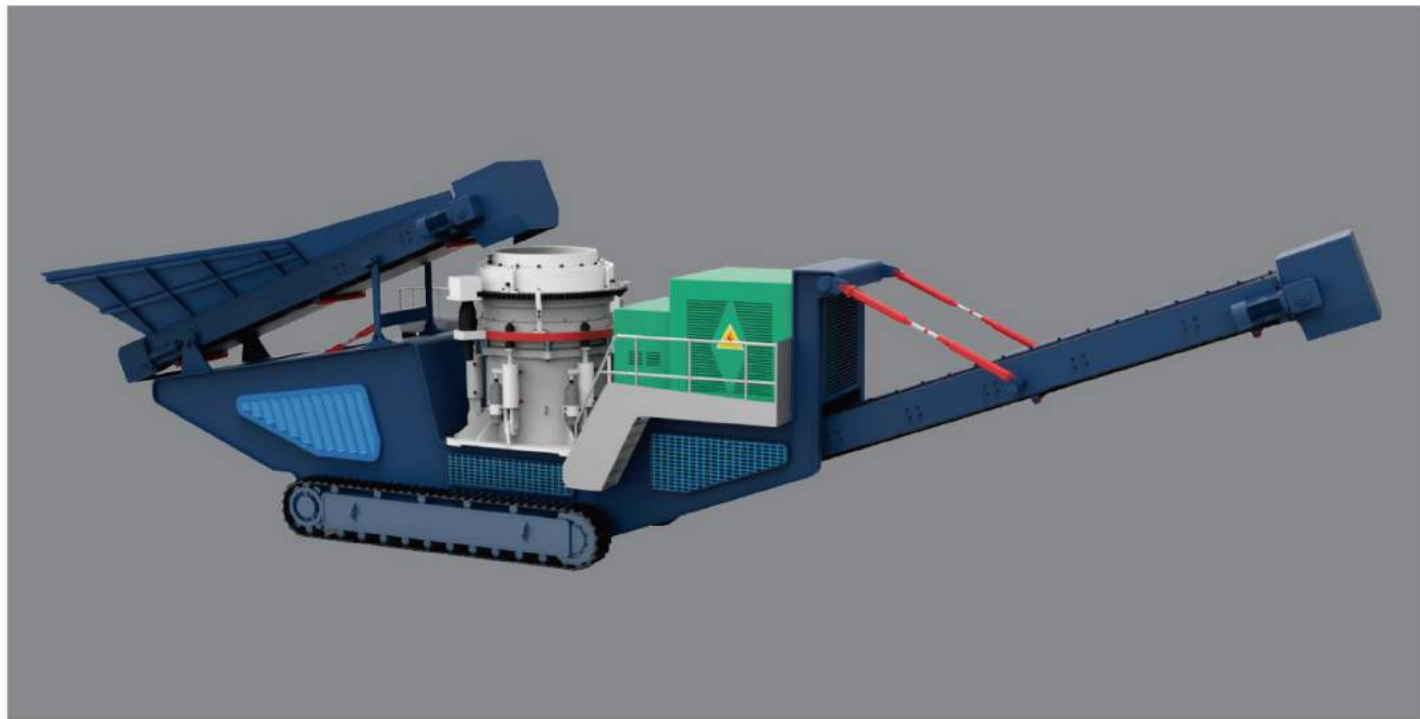

产品介绍 INTRODUCE

我公司研发生产的履带式圆锥移动站主要为了满足破碎作业中不同石质和产品用途需要而研发，充分利用圆锥破碎机破碎能力强、处理效率高等优点。


My company's R&D and production of cone break rubber-tired mobile crushing station is mainly in order to meet the rock crushing work and product use, which is developed to make full use of cone crusher crushing ability, high processing efficiency.

产品优势 ADVANTAGE

- ◆ 破碎主机高效耐磨；
- ◆ 采用自动控制系统；
- ◆ 最终产品具有优质的立方体型；
- ◆ 先进的液压润滑系统，维护保养便捷；
- ◆ 可实现快速转场作业
- ◆ Broken host high wear resistance;
- ◆ Adopt the automatic control system;
- ◆ The final product has a high quality cubic shape;
- ◆ The advanced hydraulic lubrication system, maintenance is convenient;
- ◆ Can realize quick turnarounds

产品参数 SPECIFICATION

| 型号规格        | LDYZ900  | LDYZ1300 | LDYZ1600 | LDYZ1200 |
|-------------|----------|----------|----------|----------|
| 料仓          | 整体钢结构    | 整体钢结构    | 整体钢结构    | 整体钢结构    |
| 給料皮带机       | B800     | B1000    | B1200    | B1000    |
| 圆锥式破碎机      | PSGB0918 | PSGB1324 | PSGB1636 | HPC220   |
| 最大进料粒度 (mm) | 150      | 200      | 312      | 230      |
| 生产能力 (t/h)  | 50-150   | 100-240  | 150-300  | 150-300  |
| 出料皮带机       | B800     | B100     | B1200    | B1200    |
| 液压系统        | YC20     | YC20     | YC30     | YC20     |

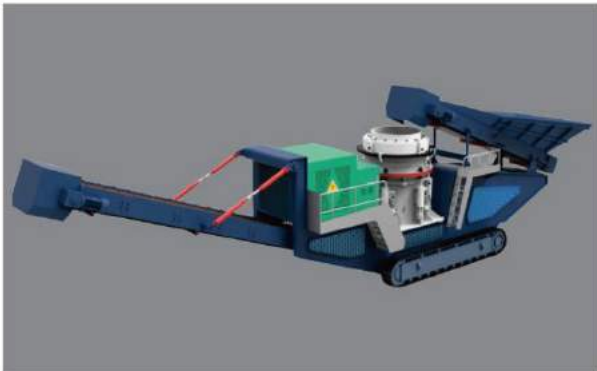

YPC系列移动式建筑垃圾破碎筛分站

YPC Series Mobile Construction Waste Crushing and Screening Station



产品介绍 INTRODUCTION

该设备是城市建筑垃圾回收利用的理想设备，也非常适合移动式功能需求较强的高品质石料厂，主机采用新型建筑垃圾专业破碎机，集合了多种破碎机优点。

The device is the ideal equipment of urban construction waste recycling, is also very suitable for strong high-quality Shi Liaochang mobile function demand, the host using new professional construction waste crusher, brings together a variety of crusher is a little bit.

产品优势 ADVANTAGE

- ◆ 主机采用新型建筑垃圾专用破碎机，可破碎多种物料；
- ◆ 进料粒度大破碎比高；
- ◆ 独特的破碎腔型设计，能够对建筑垃圾进行有效的破碎；
- ◆ 产量高，成品粒型优异，磨损成本低等革命性组合；
- ◆ 具有环保型，配置降尘降噪装置，使用环保规范电动机。
- ◆ Using new type concrete crusher;
- ◆ High crushing ratio, max feed size about one meter;
- ◆ EMobile device, convenient and transitions;
- ◆ Special designed crushing chamber, high efficiency;
- ◆ Environmental, complete plant includes dust suppression, noise protection and Euro-standard motor.

产品参数 SPECIFICATION

| 建筑垃圾移动破碎站 |         |         |             |            |       |       |       |         |      |      |          |
|-----------|---------|---------|-------------|------------|-------|-------|-------|---------|------|------|----------|
| 型号        | 破碎机     | 给料机     | 最大进料粒度 (mm) | 处理能力 (t/h) | 出料皮带机 | 返料皮带机 | 出土皮带机 | 除铁器     | 液压系统 | 车架配置 | 总功率 (kw) |
| YPC150    | PFW0810 | GZT1038 | 500         | 50-80      | B800  | B500  | B500  | RCDD-8  | YZ20 | 两桥   | 117.7    |
| YPC200    | PFW1310 | GZT1038 | 700         | 70-150     | B1000 | B650  | B500  | RCDD-10 | YZ20 | 两桥   | 162.6    |
| YPC260    | PFW1314 | GZT1538 | 800         | 120-200    | B1200 | B650  | B500  | RCDD-12 | YZ20 | 两桥   | 198.5    |
| YPC300    | PFW1318 | GZT1738 | 1000        | 200-300    | B1200 | B650  | B650  | RCDD-12 | YZ20 | 三桥   | 300      |

| 建筑垃圾移动筛分站 |         |       |       |         |           |          |          |           |      |      |          |
|-----------|---------|-------|-------|---------|-----------|----------|----------|-----------|------|------|----------|
| 型号        | 振动筛     | 上料皮带机 | 返料皮带机 | 筛下出料皮带机 | 卸料高度约 (M) | 筛前出料皮带机A | 筛前出料皮带机B | 卸料高度约 (M) | 液压系统 | 车架配置 | 总功率 (kw) |
| YPC150    | 3YA1548 | B800  | B500  | B800    | 4.2       | B500     | B500     | 3         | YZ20 | 两桥   | 50       |
| YPC200    | 3YA1860 | B1000 | B650  | B1000   | 4.2       | B500     | B500     | 3         | YZ20 | 两桥   | 61       |
| YPC260    | 3YA2160 | B1200 | B650  | B1200   | 4.2       | B650     | B650     | 3         | YZ30 | 两桥   | 82.5     |
| YPC300    | 3YA2460 | B1200 | B800  | B1200   | 4.2       | B800     | B800     | 3         | YZ30 | 两桥   | 95       |





YPPF系列建筑垃圾处理一体站

YPPF series construction waste treatment



产品介绍 INTRODUCTION

轮胎式反击破碎筛分站的推出消除了破碎时繁琐的钢架结构，地基的建设，节省了大量的时间。同时大大降低了投资成本，但却提高了投资收入。

Tyred counterattack broken screen RACES when introduced to eliminate the broken complex steel structure, the construction of the foundation, save a lot of time. At the same time, greatly reduces the cost of investment, but increased the investment income.

产品优势 ADVANTAGE

- ◆ 无需筑基，省时省力；
  - ◆ 可移动性，机动灵活；
  - ◆ 可破碎砂石料，建筑垃圾等多种物料；
  - ◆ 优质原材料、设备寿命延长；
  - ◆ 投资成本大大降低、投资回馈率高。
- ◆ Without preconditions, save time and effort;
  - ◆ Mobility and flexible;
  - ◆ Can be broken ballast, construction waste and other materials;
  - ◆ High quality raw materials, equipment, prolong service life;
  - ◆ Investment cost is greatly reduced, the investment return rate is high.

产品参数 SPECIFICATION

| 型号      | 破碎机     | 给料机     | 最大进料粒度 (mm) | 处理能力 (t/h) | 出料皮带机 | 除铁器     | 液压系统 | 振动筛     | 上料皮带机 | 返料皮带机 | 筛下出料皮带机 | 筛前出料皮带机 |
|---------|---------|---------|-------------|------------|-------|---------|------|---------|-------|-------|---------|---------|
| YPPS150 | PFW0810 | GZT1038 | 500         | 50-80      | B800  | RCDD-8  | YZ20 | 3YA1548 | B800  | B500  | B800    | B500    |
| YPPS200 | PFW1310 | GZT1038 | 700         | 70-150     | B1000 | RCDD-10 | YZ20 | 3YA1860 | B1000 | B650  | B1000   | B500    |
| YPPS260 | PFW1314 | GZT1538 | 800         | 120-200    | B1200 | RCDD-12 | YZ20 | 3YA2160 | B1200 | B650  | B1200   | B650    |



## YPPG系列新型建筑垃圾移动破碎筛分站

YPPG series new construction waste mobile crushing and screening station



### 产品介绍 INTRODUCE

配置轻物质处理兼筛分功能的新型装修垃圾破碎筛分站，轻物质分离彻底、工作效率高。破碎筛分一体机，占地面积小，整机性价比和可靠性更高。

Configuration light material handling and screening function of new type decorate garbage broken screen RACES, lightweight material separates completely, high work efficiency. Crushing and screening machine cover an area of an area small, higher cost performance and reliability.

### 产品优势 ADVANTAGE

- ◆ 主机采用新型建筑垃圾专用破碎机，可破碎多种物料；
- ◆ 配置轻物质处理兼筛分系统，生产更方便；
- ◆ 破碎筛分一体机，占地面积少；
- ◆ 良好的环保效果；
- ◆ 移动破碎，转场方便。
- ◆ Host USES of new special construction waste crusher to a variety of materials;
- ◆ Configuration lightweight material handling and screening system, production more convenient;
- ◆ The crushing and screening machine covers an area of less;
- ◆ Good environmental protection effect;
- ◆ Mobile crushing, easy transitions.

### 产品参数 SPECIFICATION


| 型号      | 给料机     | 破碎机     | 分选机     | 最大进料粒度 (mm) | 处理能力 (t/h) | 出料皮带机 | 返料皮带机 | 除铁器      | 液压系统 | 车架配置 |
|---------|---------|---------|---------|-------------|------------|-------|-------|----------|------|------|
| YPPG120 | GZT1038 | PFW0810 | GTS1548 | 500         | 50-80      | B650  | B500  | RCYD-6.5 | YZ10 | 两轴   |
| YPPG200 | GZT1038 | PFW1310 | GTS1850 | 700         | 70-150     | B800  | B650  | RCYD-8   | YZ20 | 两轴   |





FH系列建筑垃圾复合式处理站

FH series construction waste compound processing station

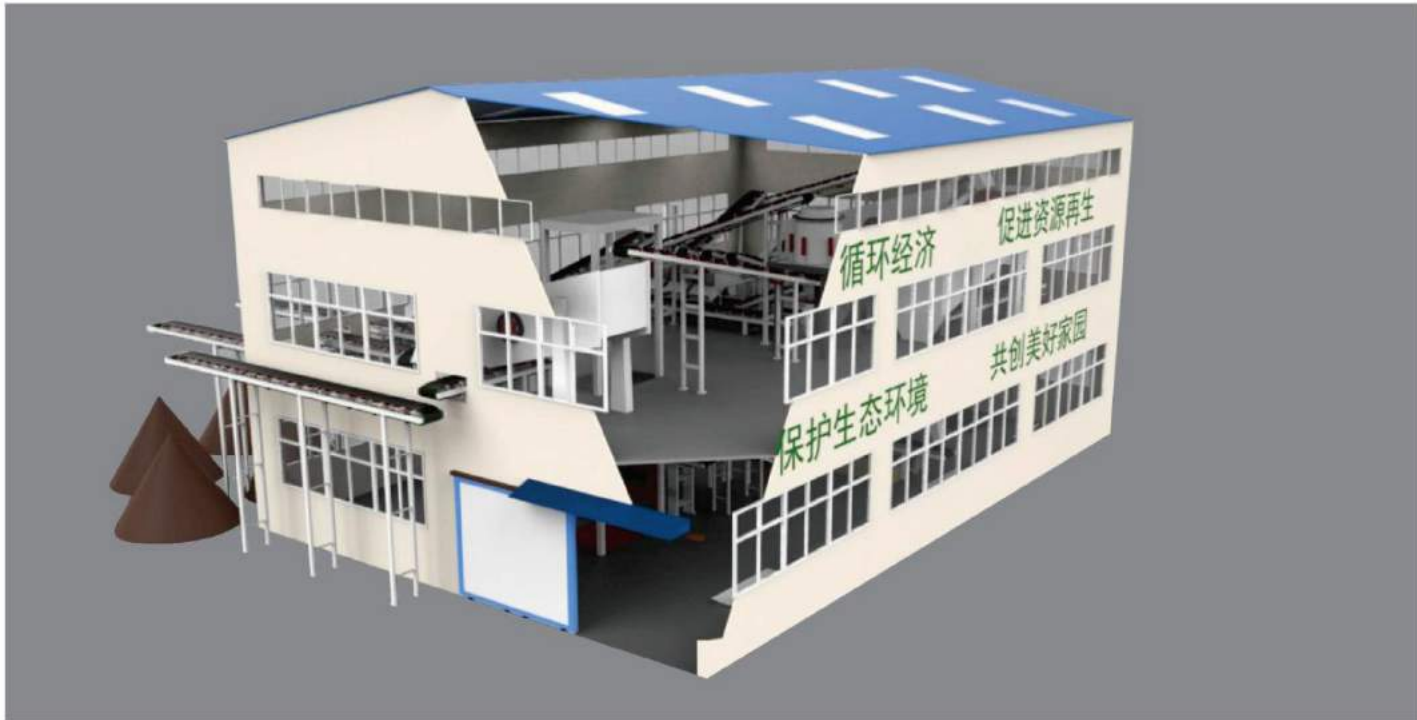

产品介绍 INTRODUCTION

新型环保固定式建筑垃圾复合处理站，采用固定式破碎筛分、洗选、风选等设备在工厂处理建筑垃圾，整条生产线采用封闭式设计，可以做到建筑垃圾处理无污染、低碳环保。


New fixed construction waste treatment station, stationary crushing screening and washing, air separation equipment such as dealing with construction waste in the factory, the whole production line adopts enclosed design, can achieve the construction waste processing pollution-free, low carbon environmental protection.

产品优势 ADVANTAGE

- ◆ 适合建筑垃圾资源化处理深加工；
- ◆ 可建设日产处理万吨以上的大型建筑垃圾处理生产线；
- ◆ 封闭式车间设计，彻底解决各种污染问题；
- ◆ 整条生产线有先进的除尘降噪装置；
- ◆ 采用微电脑全自动控制，自动化程度高。
- ◆ Suitable for construction waste recycling processing;
- ◆ May Day processing ten thousand tons of production lines;
- ◆ Enclosed workshop design, completely solve the pollution problem;
- ◆ Production line with advanced noise reduction of dust removal device;
- ◆ Microcomputer automatic control, high degree of automation.

产品参数 SPECIFICATION

| 名称        | FH2000      |         | FH3000      |          | Fh4000       |          |
|-----------|-------------|---------|-------------|----------|--------------|----------|
| 振动给料机     | ZSW38095    | 11KW    | ZSW4911     | 15KW     | ZSW6013      | 30KW     |
| 颧式破碎机     | PE6090      | 75KW    | PE7510      | 110KW    | PE1012       | 160KW    |
| 振动给料机     | GZT1038     | 7.4KW   | GZT1338     | 114KW    | GZT1520      | 26KW     |
| 建筑垃圾破碎机   | PFW1310     | 132KW   | PFW1314     | 160KW    | PFW1520      | 440KW    |
| 自卸式除铁器    | RCDD-8      | 4KW     | RCDD-10     | 4KW      | RCDD-10      | 4KW      |
| 分选机       | CTF1850     | 15KW    | CTF2050     | 30KW     | CTF2050 (2台) | 60KW     |
| 振动筛       | 2YA1548     | 15KW    | 2YA1860     | 18.5KW   | 2YA2460      | 30KW     |
| 振动筛       | 3YA2160     | 30KW    | 3YA2460     | 37KW     | 3YA3275      | 45KW     |
| 轻物质风选分离机  | FX65        | 11KW    | FX80        | 16.5KW   | FX100        | 16.5KW   |
| 轻物质风选分离机  | FS80        | 11.5KW  | FS150       | 15KW     | FS150 (2台)   | 30KW     |
| 振动筛       | 4YA2160     | 30KW    | 4YA2460     | 30KW     | 4YA3275      | 45KW     |
| 圆锥破碎机     | GP100       | 90KW    | GP100       | 90KW     | GP200        | 132KW    |
| 电子脉冲布袋收尘器 | XM200+XM250 | 53.5+70 | XM200+XM250 | 70+105KW | XM250+XM350  | 70+105KW |

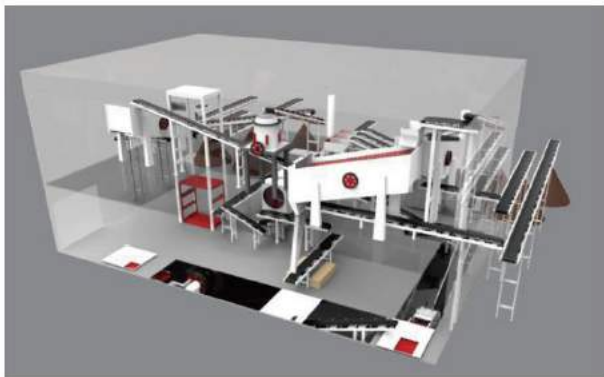



YDS系列轮胎式移动破碎筛分站

YDS series tyre type mobile crushing and screening machine



产品介绍 INTRODUCTION

我厂生产的轮胎式移动破碎站配置坚固的移动车架，可在公路上行驶方便进入作业现场，大量节省物料运输费用，可为客户节约大量生产成本。

Jin likes production rubber-tyred mobile crushing plant configuration strong mobile frame, can be in convenient road into the work site, a large number of saving material transportation cost, can save a lot of the cost of production for the customer.

YDGE系列轮胎式颚破移动站产品参数 SPECIFICATION

| 型号          | YDGE0750  | YDGE0960  | YDGE1175   | YDGE1308 |
|-------------|-----------|-----------|------------|----------|
| 料仓          | 整体钢结构     | 整体钢结构     | 整体钢结构      | 整体钢结构    |
| 给料机         | GZT0724   | GZT0932   | GZT1142    | ZSW1242  |
| 颚式破碎机       | PE500×750 | PE600×900 | PE750×1060 | PEW1208  |
| 最大进料粒度 (mm) | 425       | 500       | 630        | 750      |
| 排料口调范围 (mm) | 50-100    | 65-180    | 80-180     | 100-275  |
| 生产能力 (t/h)  | 40-110    | 70-120    | 130-260    | 270-320  |
| 主皮带机        | B650      | B800      | B1000      | B1400    |
| 出料皮带机       | B800      | B800      | B1000      | B1200    |
| 出土皮带机       | B500      | B500      | B500       | B650     |
| 液压系统        | YE0       | YZ10      | YZ30       | YZ40     |
| 车架配置        | 两桥        | 两桥        | 三桥         | 四桥       |

YDFS系列轮胎式反击移动筛分站产品参数 SPECIFICATION

| 型号          | YDFS1215 | YDFS1218 | YDFS1321 | YDFS1324 |
|-------------|----------|----------|----------|----------|
| 振动筛         | 3YA1548  | 3YA1860  | 3YK2160  | 3YK2460  |
| 反击破碎机       | PF1210   | PF1214   | PF1315   | PF1320   |
| 最大进料边长 (mm) | 350      | 350      | 500      | 500      |
| 生产能力 (t/h)  | 50-80    | 100-150  | 150-200  | 250-300  |
| 筛下出料皮带机     | B800     | B1000    | B1200    | B1400    |
| 液压系统        | YZ20     | YZ20     | YZ30     | YZ50     |
| 车架配置        | 两桥       | 两桥       | 三桥       | 三桥       |





YDYS系列轮胎式圆锥移动筛分站 产品参数 SPECIFICATION


| 型号          | YDYS0915 | YDYS1318 | YDYS1621 | YDYS1321 | YDYS1281 |
|-------------|----------|----------|----------|----------|----------|
| 振动筛         | 2YA1548  | 3YA1860  | 3YK2160  | 3YK2160  | 3YK1860  |
| 圆锥破碎机       | PSGB0918 | PSGB1324 | PSGB1636 | HPC300   | PYB1200  |
| 最大进料粒度 (mm) | 150      | 205      | 313      | 241      | 1457     |
| 排料口调范围 (mm) | 25-38    | 19-51    | 38-64    | 26-45    | 20-50    |
| 生产能力(t/h)   | 50-100   | 100-150  | 150-220  | 200-250  | 80-120   |
| 出料皮带机       | B650     | B800     | B1200    | B1200    | B800     |
| 液压系统        | YZ20     | YZ20     | YZ30     | YZ30     | YZ30     |
| 总功率(kw)     | 160      | 261      | 261      | 261      | 143.5    |
| 车架配置        | 两桥       | 两桥       | 三桥       | 两桥       | 两桥       |

YDLS系列轮胎式立破移动筛分机 产品参数 SPECIFICATION

| 型号         | YDLS0815   | YDLS9518   | YDLS1121   |
|------------|------------|------------|------------|
| 振动筛        | 3YA1548    | 3YA1860    | 3YK2160    |
| 立式冲击破碎机    | VSI8516/20 | VSI9526/28 | VSI1028/32 |
| 最大进料粒度(mm) | 45         | 50         | 55         |
| 通过量(t/h)   | 80-150     | 120-250    | 180-300    |
| 筛下出料皮带机    | B650       | B800       | B1200      |
| 液压系统       | YZ20       | YZ20       | YZ30       |
| 总功率(kw)    | 186.5      | 287        | 372.5      |
| 车架配置       | 两桥         | 两桥         | 两桥         |



JC系列颞式破碎机  
JC Series Jaw Crusher

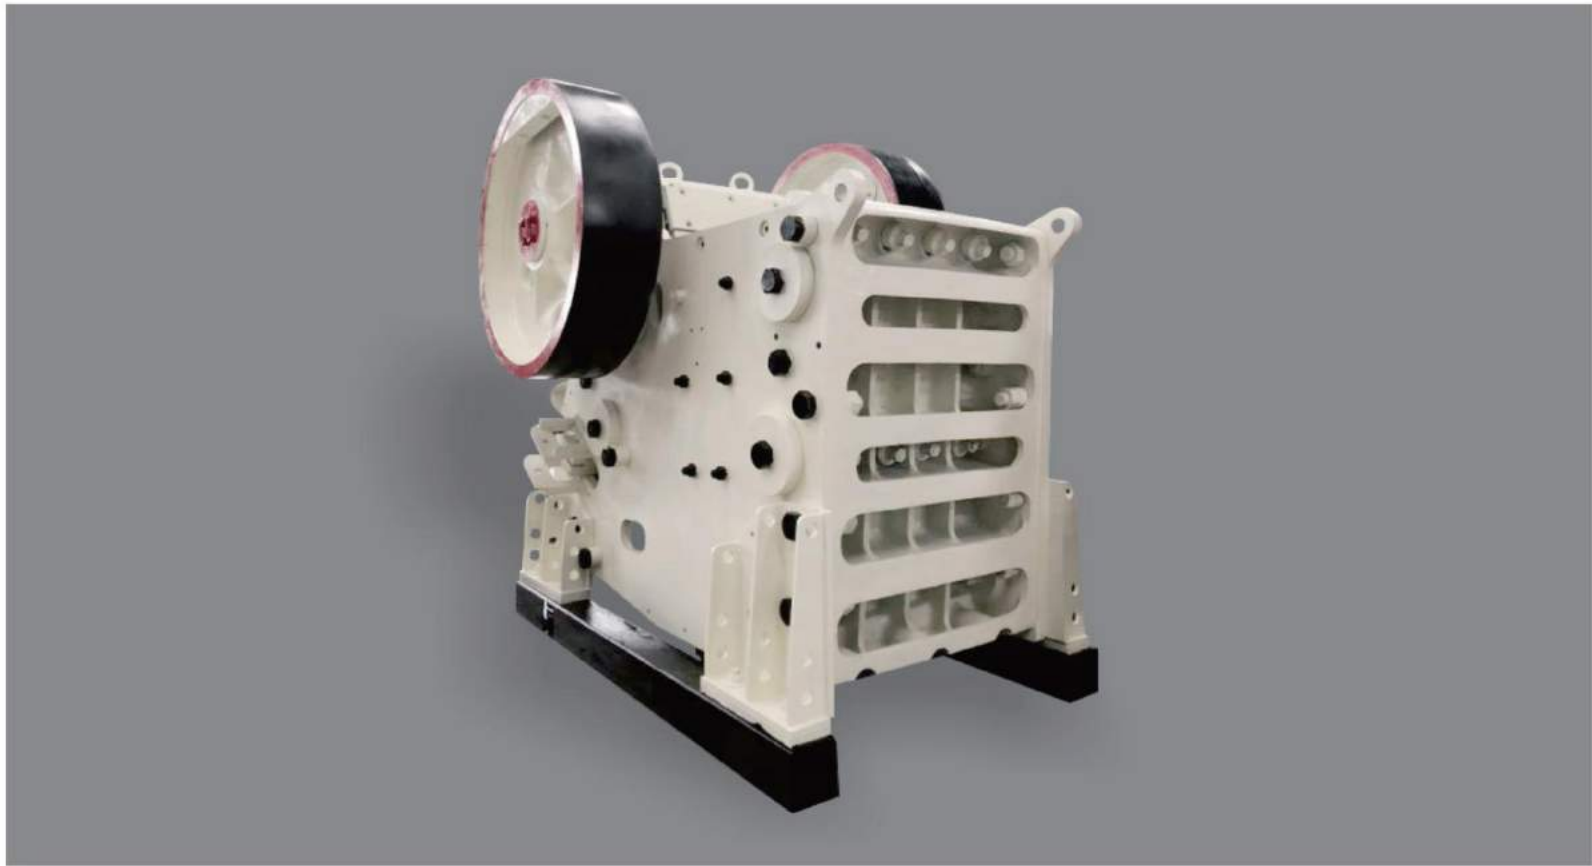

产品介绍 INTRODUCE

JC系列颞式破碎机是我公司在引进，吸收欧美先进颞式破碎机技术的基础上，经过优先设计研制而成的新型颞式破碎机，是粗碎各种岩石的优选设备。

JC series jaw crusher is my company in the introduction, absorption of European and American advanced technology on the basis of the jaw crusher, designed and developed by priority and become a new type of jaw crusher, is the preferred equipment for coarse crushing all kinds of rocks.

产品优势 ADVANTAGE

- ◆ 模块式、无焊接框架结构；
  - ◆ 优越的腔型设计；
  - ◆ 一体化电机安装，方便快捷；
  - ◆ 可修复机架，维修成本低；
  - ◆ 独特的橡胶减震装置固定，减震效果好。
- ◆ Modular, no welding frame structure;
  - ◆ Superior cavity design;
  - ◆ Integration of electrical installation, convenient and quick;
  - ◆ Can repair the machine frame, low maintenance cost;
  - ◆ Unique fixed rubber shock absorber, the damping effect is good.

产品参数 SPECIFICATION

| 型号规格  | 进料口尺寸 (mm) | 电机功率 (kw) | 排料间隙 (mm) |       |        |         |         |         |         |         |         |          |          |           |           |
|-------|------------|-----------|-----------|-------|--------|---------|---------|---------|---------|---------|---------|----------|----------|-----------|-----------|
|       |            |           | 破碎产量TPH   |       |        |         |         |         |         |         |         |          |          |           |           |
|       |            |           | 40        | 50    | 60     | 70      | 80      | 100     | 125     | 150     | 175     | 200      | 225      | 250       | 300       |
| JC80  | 800×510    | 75        | 65-75     | 85-95 | 95-125 | 115-150 | 130-170 | 165-215 | 210-270 | 250-325 | 390-380 |          |          |           |           |
| JC100 | 1000×760   | 110       |           |       |        | 150-210 | 170-225 | 215-280 | 265-345 | 315-410 | 371-480 | 420-545  |          |           |           |
| JC110 | 1100×850   | 160       |           |       |        | 190-250 | 210-275 | 255-330 | 310-405 | 30-480  | 425-550 | 480-625  |          |           |           |
| JC125 | 1250×950   | 160       |           |       |        |         |         | 290-380 | 350-455 | 415-535 | 470-610 | 530-690  | 590-770  | 650-845   |           |
| JC145 | 1400×1070  | 200       |           |       |        |         |         |         | 400-520 | 470-610 | 540-700 | 610-795  | 680-975  | 750-975   |           |
| JC160 | 1600×1200  | 250       |           |       |        |         |         |         |         | 520-675 | 595-775 | 675-880  | 750-975  | 825-1070  | 985-1275  |
| JC200 | 2000×1500  | 400       |           |       |        |         |         |         |         |         | 760-990 | 955-1100 | 945-1230 | 1040-1350 | 1225-1590 |



CS系列底部单缸液压圆锥破碎机  
CS series bottom single cylinder hydraulic cone crusher



产品介绍 INTRODUCE

Cs系列底部单缸液压圆锥破碎机集机械、液压、电气、自动化、智能控制等技术于一体，技术高级，可广泛应用于金属与非金属矿、沙石等行业的中碎、细碎和超细碎作业。

CS at the bottom of the single-cylinder hydraulic cone crusher integrates mechanical, hydraulic, electrical, automation, intelligent control technology at an organic whole, such as advanced technology, can be widely used in metal and non-metallic mineral, sand and other industries crushing, fine grinding and ultra fine grinding in the homework.




产品优势 ADVANTAGE


- ◆ 技术先进，生产效率高；
  - ◆ 出料粒度均匀，成型好；
  - ◆ 采用先进润滑系统，易保养；
  - ◆ 生产能力大，作业效率高；
  - ◆ 维修简便、操作使用方便。
- ◆ Advanced technology, high production efficiency;
  - ◆ Discharging granularity and good shape;
  - ◆ The use of advanced lubrication system, easy maintenance;
  - ◆ Production capacity is big, high work efficiency;
  - ◆ Maintenance is simple, operation is convenient.

产品参数 SPECIFICATION

| 型号    | 最大给料尺寸(mm) | 排矿口范围(mm) | 电机功率(kw) | 生产能力(t/h) |
|-------|------------|-----------|----------|-----------|
| C420  | 135        | 4-35      | 90       | 22-128    |
| C420S | 240        | 5-41      | 90       | 70-168    |
| C430  | 185        | 15-38     | 132      | 37-219    |
| C430S | 360        | 19-51     | 132      | 91-344    |
| C440  | 215        | 8-44      | 250      | 68-413    |
| C440S | 440        | 25-54     | 250      | 195-601   |
| C660  | 275        | 13-51     | 315      | 143-662   |
| C660S | 560        | 38-83     | 315      | 318-1050  |
| C870  | 300        | 10-70     | 520      | 260-1130  |

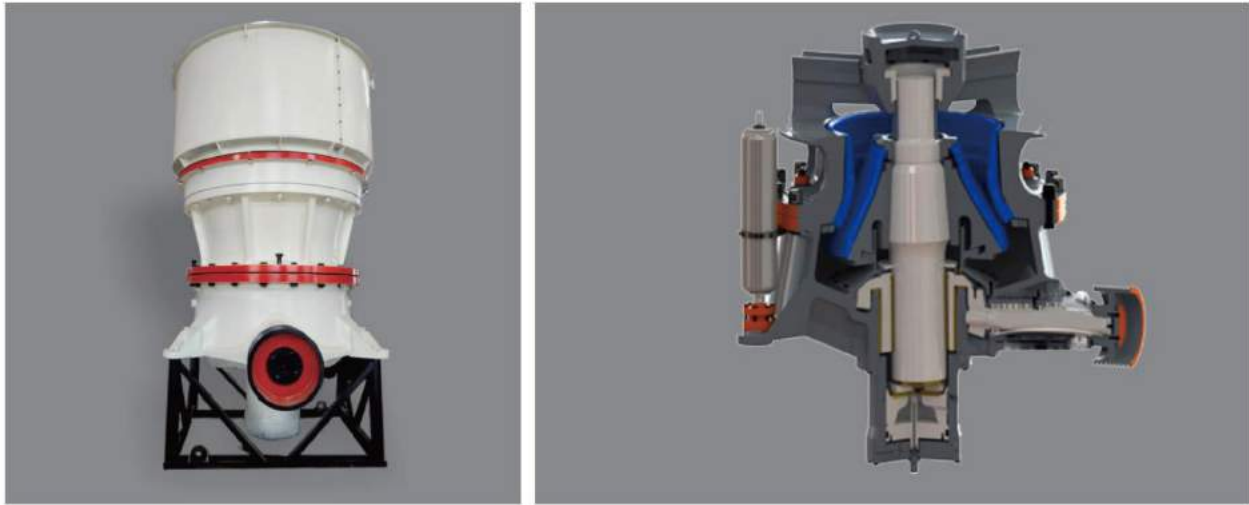

ZPC系列重型锤式破碎机  
ZPC Heavy Hammer Crusher

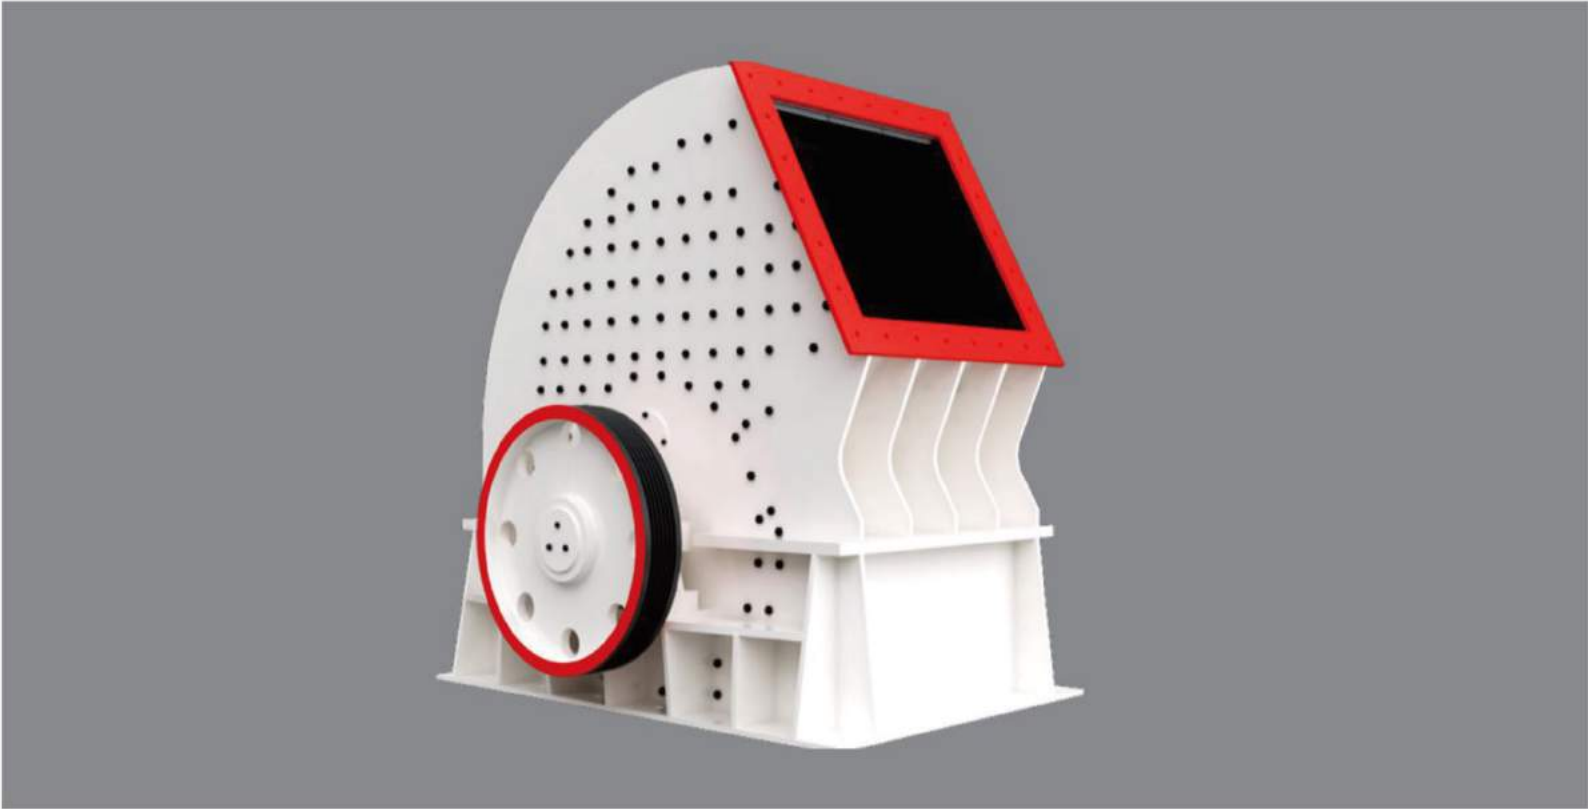

产品介绍 INTRODUCE

ZPC重型锤式破碎机具有破碎比大、产量高、对大物料可一次破碎成型，无需整形，变二级破碎为一级破碎的能力，直接可以降低成本40%左右，耗能低，投资少。

ZPC heavy hammer crusher, big crushing ratio, high production, the material can be a broken molding, need not plastic, made the secondary crushing level broken ability, can directly reduce the cost by about 40%, low energy consumption, less investment.

产品优势 ADVANTAGE

- ◆ 破碎整形一机搞定，可降低成本40%；
  - ◆ 无篦条设计，不会堵料；
  - ◆ 蜗壳设计，机体结实，耐冲击不变形；
  - ◆ 选配工装，方便更换锤头、锤轴；
  - ◆ 采用卡簧销轴固定的耐磨护圈，更换方便，增加开机时间。
- ◆ Broken plastic machine, can reduce costs by 40%;
  - ◆ No grate design, not plugging material;
  - ◆ Design of the spiral case, the body strong, resistant to impact deformation;
  - ◆ Equipped with tooling, convenient change hammer, hammer axis;
  - ◆ Adopt the cotter pin shaft fixed retainer wear-resisting, easy to change, increase the boot time.


产品参数 SPECIFICATION

重型


| 型号     | 转子直径（mm）  | 进料口尺寸（mm） | 进料粒度（mm） | 生产能力（t/h） | 电机功率（kw）    |
|--------|-----------|-----------|----------|-----------|-------------|
| PC1308 | 1310×790  | 800×850   | ≤500     | 100-160   | 132kw-4     |
| PC1512 | 1500×1160 | 1200×900  | ≤600     | 250-400   | (160kw-4)×2 |
| PC1615 | 1675×1510 | 1480×1200 | ≤650     | 400-800   | (220kw-4)×2 |
| PC1815 | 1776×1510 | 1480×1200 | ≤650     | 400-900   | (220kw-4)×2 |
| PC1820 | 1800×1964 | 2000×1200 | ≤800     | 800-1500  | 800kw-6     |
| PC2125 | 2100×2486 | 2600×1690 | ≤1200    | 2000-3000 | 1250kw-6    |

标准型

| 型号     | 转子直径（mm）  | 进料口尺寸（mm） | 进料粒度（mm） | 生产能力（t/h） | 电机功率（kw）    |
|--------|-----------|-----------|----------|-----------|-------------|
| PC0910 | 900×1000  | 1070×750  | ≤200     | 150-200   | (110kw-4)×2 |
| PC1012 | 1000×1180 | 1255×810  | ≤200     | 250-300   | (132kw-4)×2 |
| PC1213 | 1200×1280 | 1350×900  | ≤200     | 300-350   | (160kw-4)×2 |
| PC1216 | 1270×1490 | 1530×920  | ≤250     | 400-500   | (200kw-4)×2 |
| PC1220 | 1220×1950 | 2000×920  | ≤250     | 500-700   | (250kw-4)×2 |
| PC1622 | 1580×2150 | 2290×960  | ≤300     | 600-900   | 630kw-6     |

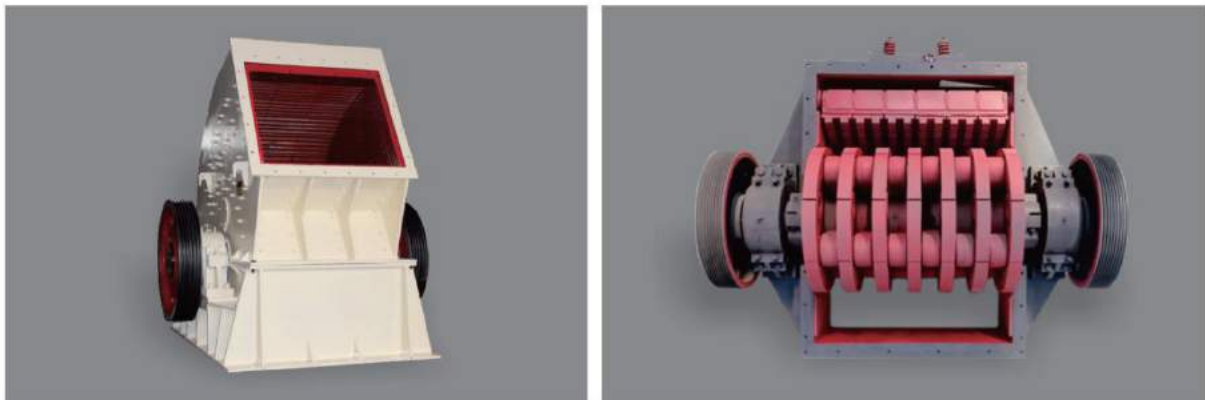

YAX系列稀油润滑振动筛  
YAX Series Light Oil Lubricated Vibrating Screen

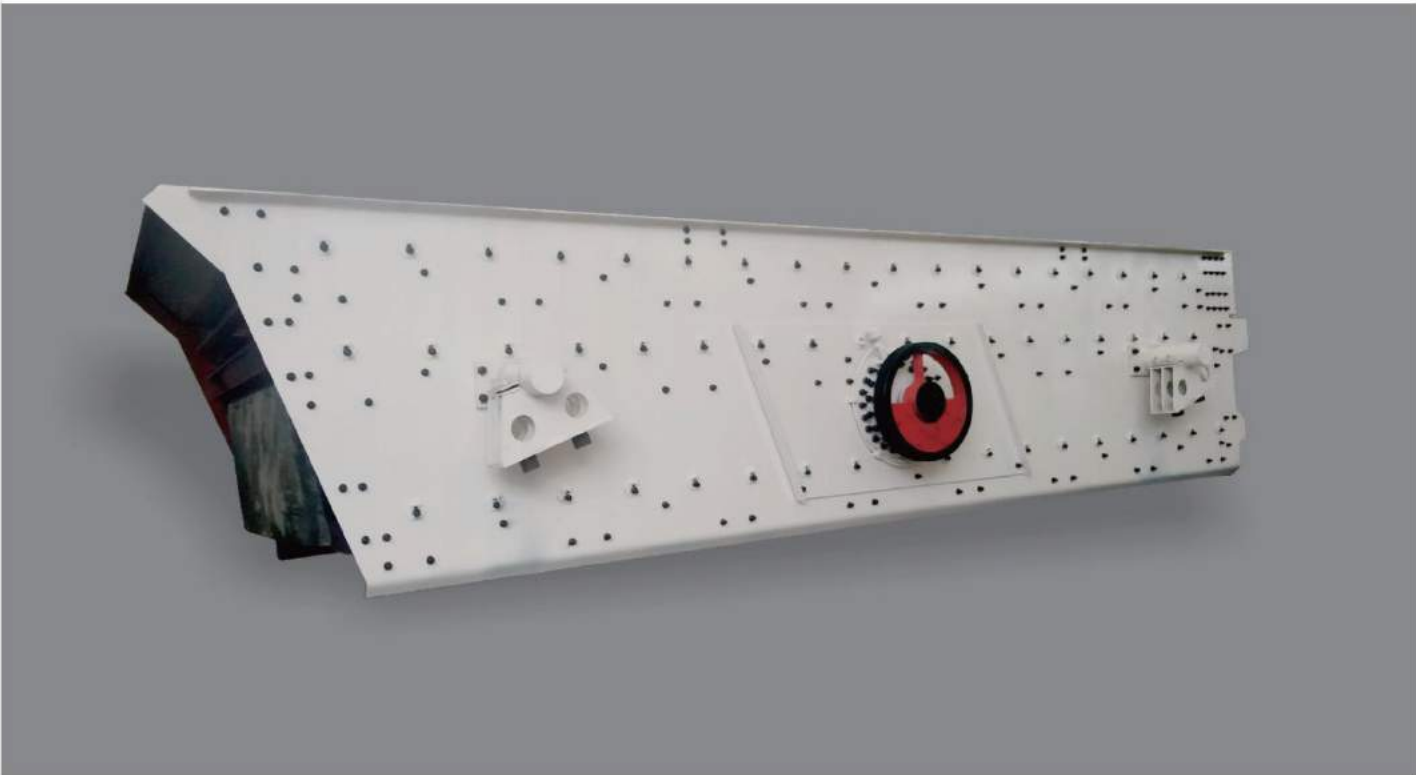

产品介绍 INTRODUCE

YAX系列稀油循环润滑的振动筛，是一种筛分效率高、工作稳定可靠的破碎行业筛分设备，是砂石生产线产品分级筛分必不可少的。

Series YAX thin oil circulation lubrication of vibrating screen, is a kind of high screening efficiency, stable and reliable work of crushing industry screening equipment, it is necessary for sand production line products classification screening.



产品优势 ADVANTAGE

- ◆ 处理能力大，筛分效率高；

◆ 振动器采用轴承稀油润滑，轴承负荷小、温度低、噪音小；

◆ 提高了轴承的使用寿命；

◆ 操作简单，减少维修注油时间，增加机器运行时间；

◆ 运行稳定，可连续作业。
- ◆ Processing capacity is big, high screening efficiency;

◆ Vibrator with thin oil lubrication of the bearing;


◆ The service life of the bearing is improved;

◆ Simple operation, reduce oil injection time, increase machine running time;

◆ It runs staby and can work continuously.


产品参数 SPECIFICATION

| 型号       | 筛网层数 | 筛网倾角 (°C) | 筛网面积 (m²) | 震动频率 (r/min) | 双振幅 (mm) | 处理能力 (m³/h) | 电机功率 (AW) |
|----------|------|-----------|-----------|--------------|----------|-------------|-----------|
| 2YAX1548 | 2    | 17.5      | 7.2       | 970          | 6-8      | 28-270      | 15        |
| 3YAX1548 | 3    | 17.5      | 7.2       | 970          | 6-8      | 28-270      | 15        |
| 4YAX1548 | 4    | 17.5      | 7.2       | 970          | 6-8      | 28-270      | 18.5      |
| 2YAX1860 | 2    | 20        | 10.8      | 970          | 6-8      | 32-350      | 18.5      |
| 3YAX1860 | 3    | 20        | 10.8      | 970          | 6-8      | 32-350      | 18.5      |
| 4YAX1860 | 4    | 20        | 10.8      | 970          | 6-8      | 32-350      | 22        |
| 2YAX2160 | 2    | 20        | 12.6      | 970          | 6-8      | 40-720      | 22        |
| 3YAX2160 | 3    | 20        | 12.6      | 970          | 6-8      | 40-720      | 30        |
| 4YAX2160 | 4    | 20        | 12.6      | 970          | 6-8      | 40-720      | 30        |
| 2YAX2460 | 2    | 20        | 14.4      | 970          | 6-8      | 50-750      | 30        |
| 3YAX2460 | 3    | 20        | 14.4      | 840          | 7-9      | 50-750      | 30        |
| 4YAX2460 | 4    | 20        | 14.4      | 840          | 6-9      | 50-750      | 37        |
| 2YAX2475 | 2    | 20        | 18        | 840          | 6-8      | 60-850      | 30        |
| 3YAX2475 | 3    | 20        | 18        | 840          | 6-8      | 60-850      | 37        |
| 4YAX2475 | 4    | 20        | 18        | 840          | 6-8      | 60-850      | 45        |
| 2YAX3060 | 2    | 20        | 18        | 840          | 6-8      | 70-900      | 37        |
| 3YAX3060 | 3    | 20        | 18        | 840          | 6-8      | 70-900      | 45        |
| 4YAX3060 | 4    | 20        | 18        | 840          | 6-8      | 70-900      | 2*30      |
| 2YAX3080 | 2    | 20        | 24        | 840          | 6-8      | 84-1080     | 2*30      |
| 3YAX3080 | 3    | 20        | 24        | 840          | 6-8      | 84-1080     | 2*37      |
| 4YAX3080 | 4    | 20        | 24        | 840          | 6-8      | 84-1080     | 2*45      |
| 2YAX3280 | 2    | 20        | 25.6      | 840          | 6-8      | 100-1200    | 2*30      |
| 3YAX3280 | 3    | 20        | 25.6      | 840          | 6-8      | 100-1200    | 2*45      |
| 4YAX3280 | 4    | 20        | 25.6      | 840          | 6-8      | 100-1200    | 2*45      |
| 2YAX3680 | 2    | 20        | 28.8      | 800          | 8-10     | 149-1620    | 2*45      |
| 3YAX3680 | 3    | 20        | 28.8      | 800          | 8-10     | 149-1620    | 2*45      |
| 2YAX4095 | 2    | 20        | 38        | 800          | 8-10     | 200-1800    | 2*55      |
| 3YAX4095 | 3    | 20        | 38        | 800          | 8-10     | 200-1800    | 2*75      |

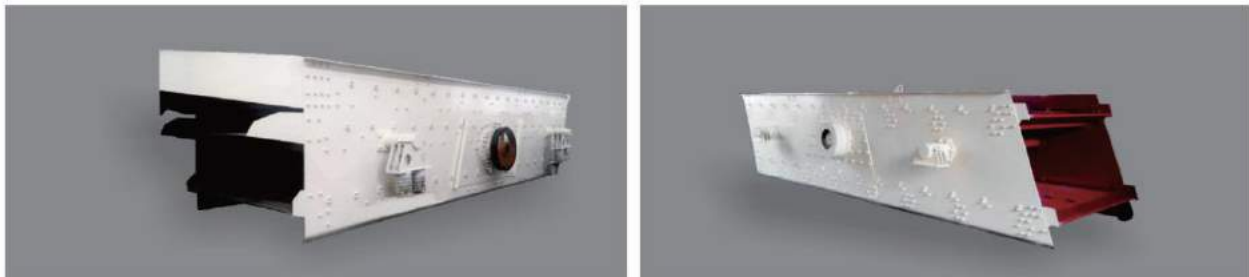

TES系列三轴水平振动筛

TES Series Three-Axis Horizontal Vibrating Screen

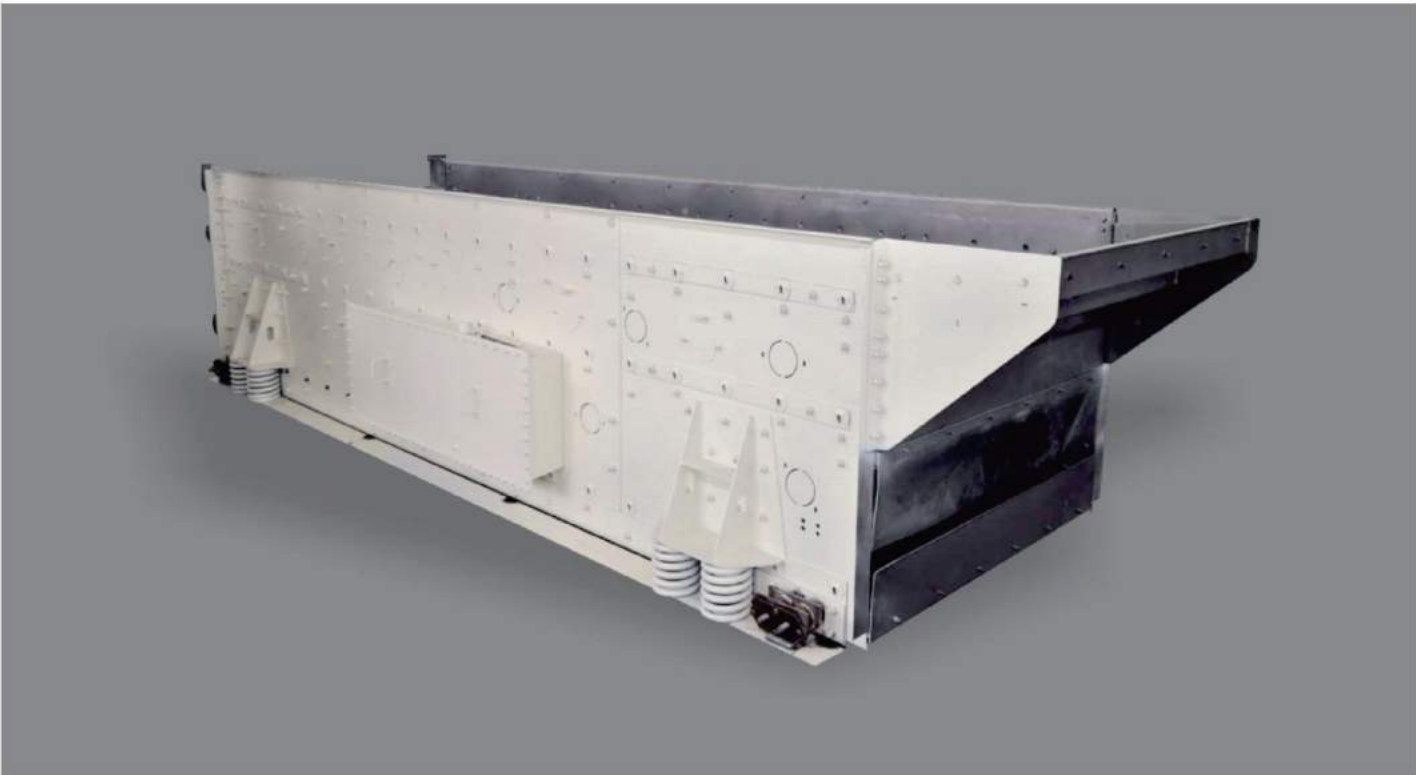

产品介绍 INTRODUCE

普盛三轴椭圆振动筛是吸收国内外同类型振动筛技术而研制的振动筛，水平安装，占用现场空间小，是移动筛分站上非常理想的设备。

Means of three-axis elliptic vibrating screen is to absorb the same type vibrating screen technology at home and abroad and the development of vibrating screen, horizontal installation, take up the space is small, it is the ideal equipment for mobile screen on the substation is very.

产品优势 ADVANTAGE

- ◆ 处理能力大，筛分效率高；

◆ 筛机运行轨迹为椭圆形，运动平稳，功耗低；

◆ 轴承稀油润滑，有效降低了轴承温度，提高了寿命；

◆ 水平安装，振幅大。
- ◆ Processing capacity is big, high screening efficiency;



◆ Sieve machine running track for elliptic, smooth movement, low power consumption;

◆ Bearing thin oil lubrication, effectively reduce the bearing temperature, increase the life;

◆ Horizontal installation, large amplitude.

产品参数 SPECIFICATION

| 型号       | 筛面规格<br>宽*长(m*m) | 筛网面积<br>(m <sup>2</sup> ) | 筛网层数 | 进料粒度<br>(mm) | 双振幅<br>(mm) | 震动频率<br>(r/min) | 处理能力<br>(t/h) | 电机功率<br>(kw) |
|----------|------------------|---------------------------|------|--------------|-------------|-----------------|---------------|--------------|
| 3TES1860 | 1.8*6.0          | 10.8                      | 3    | 150          | 14-18       | 645-875         | 160-320       | 30           |
| 3TES2160 | 2.1*6.0          | 12.6                      | 3    | 150          | 14-18       | 645-875         | 200-385       | 37           |
| 3TES2460 | 2.4*6.0          | 14.4                      | 3    | 150          | 14-18       | 645-875         | 240-462       | 45           |

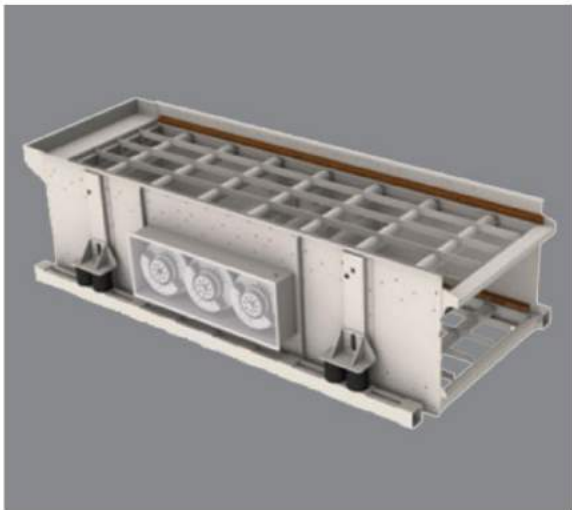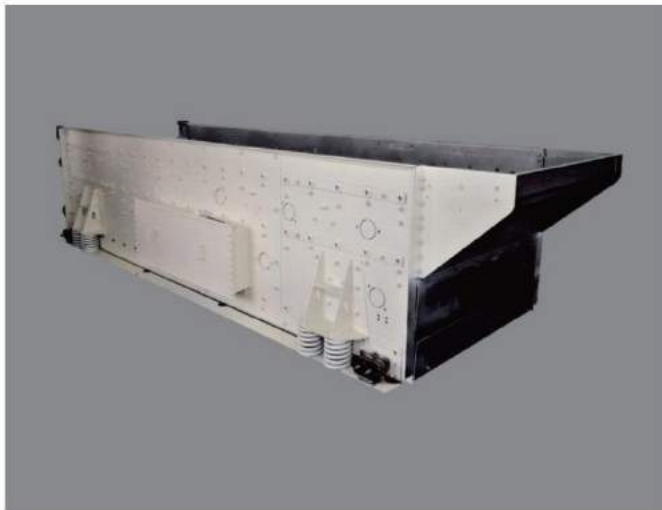

FS系列轻质物浮洗分离器

Light substance flotation separator




产品参数 SPECIFICATIONS

| 型号<br>Model | 进料粒度<br>Feed grain suze | 处理量<br>Processing quantity | 功率<br>Power | 用水量<br>Water consumption |
|-------------|-------------------------|----------------------------|-------------|--------------------------|
| FS80        | 8-50mm                  | 40-80T/H                   | 10.7kw      | 6-12m <sup>3</sup>       |
| FS150       | 8-50mm                  | 80-150T/H                  | 23.4kw      | 11-25m <sup>3</sup>      |

FX系列轻物质风选分离器

Light Material Air Separator

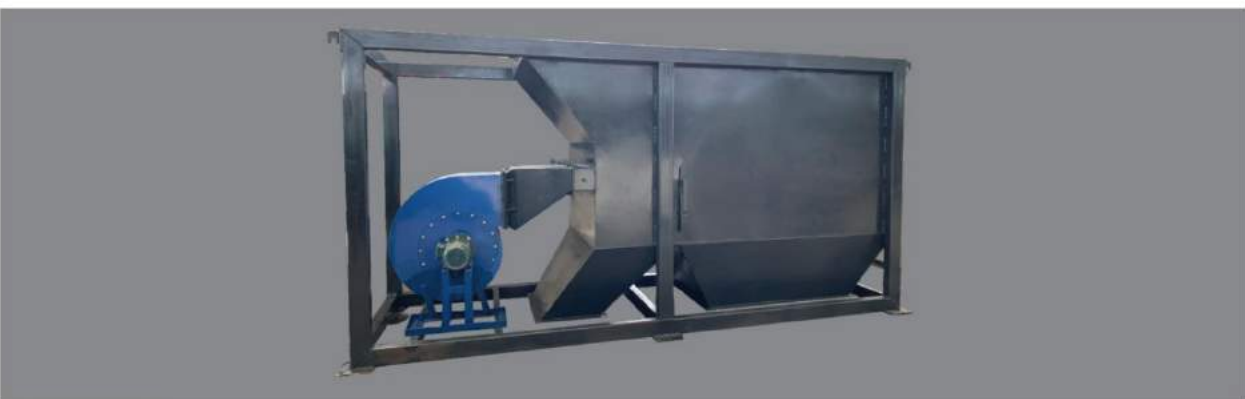

产品参数 SPECIFICATIONS

| 型号<br>Model | 进料粒度<br>Feed grain suze | 处理量<br>Processing quantity | 功率<br>Power |
|-------------|-------------------------|----------------------------|-------------|
| FX65        | 8-50mm                  | 50-80T/H                   | 2.2kw       |
| FX80        | 8-60mm                  | 80-120T/H                  | 3kw         |
| FX100       | 8-80mm                  | 100-150T/H                 | 4kw         |



## 发货现场

Delivery Site



## 发货现场

Delivery Site





## 客户现场

Customer Site



## 客户现场

Customer Site

